




## Hydraulic spreading wedge YSW-14T

The spreading wedge YSW-14T has been developed as the simple cost-effective solution for flange spreading. An access gap of min. 6.5mm is needed. With a max. working pressure of 700 bar the max. spreading force is 14t. The spreading wedge can be operated by using a hydraulic hand pump or foot pump.

### Mini kit

(EAN-No. 4025092438025)

- 1 x Lifting wedge YSW-14T
- 1 x Safety block
- 1 x Instruction manual
- 1 x Carrying case



### Stepped block

(EAN-No. 4025092336383)


- 2 x Stepped block
- 2 x Screws CSK M6 x 12 mm
- 1 x Allen key



### Standard kit

(EAN-No. 4025092438148)


- 1 x Lifting wedge YSW-14T
- 1 x 700 bar hydraulic hand pump two-stage
- 1 x 700 bar hydraulic hose
- 1 x Safety block
- 1 x Instruction manual
- 1 x Carrying case

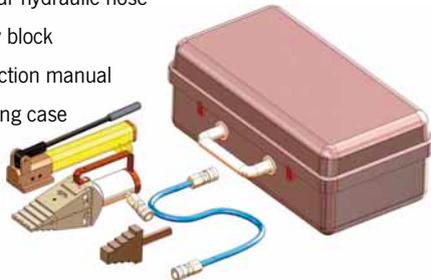


### Maxi kit

(Art.-No. 12701814)


- 2 x Lifting wedge YSW-14T
- 1 x 700 bar hydraulic pump two-stage
- 2 x 700 bar hydraulic hose
- 2 x Safety block
- 1 x Instruction manual
- 1 x Twin manifold block
- 1 x Carrying case

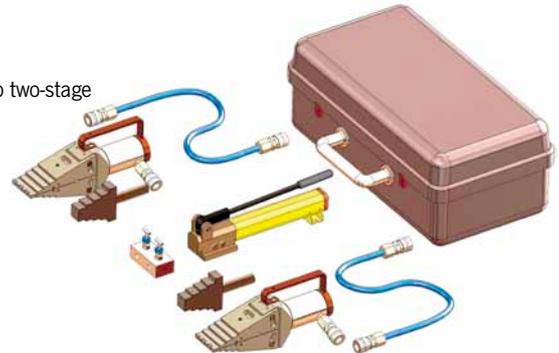


## Dimensions model YSW-14T

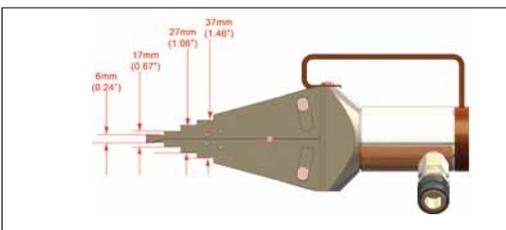

Wedge, closed

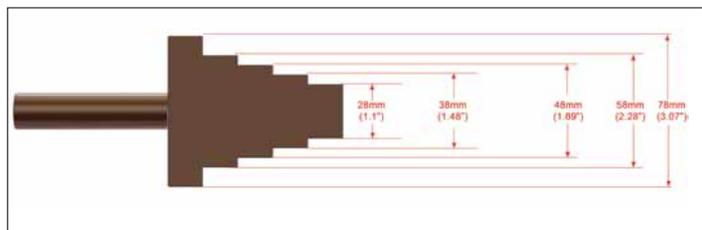

Safety block, side view

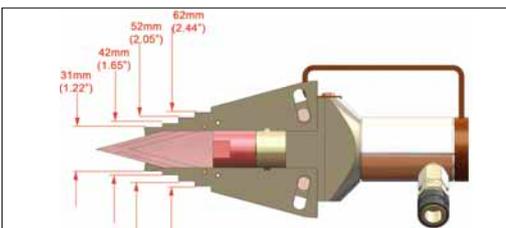

Wedge, opened



Stepped block, top view

**Selection charts for suitable combination of spreading wedge and hydraulic pumps can be found on page 461**