


Galvanised Turnbuckle Jaw/Jaw



- * **Material:** Drop Forged High Tensile Steel
SAE 1035 or 1045
- * **Safety Factor:** MBL equals 5 x SWL
capacity
- * **Standard:** Generally to ASTM F1145-92
Formerly U.S. Fed. Spec FF-T-791b
- * **Finish:** Hot Dipped Galvanised
- * **Certificate:** Supplied with relevant
Certificates

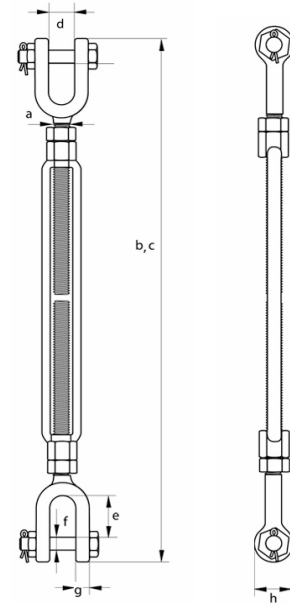

Diameter Thread	Take Up	Length Closed Position	Length Open Position	Opening Jaw	Length Inside	DIA Pin	Thickness Jaw Eye	DIA Jaw Eye	WLL	Weight Each
A Inches	Inches	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Tonnes	KG
3/8	6	302	454	13	22	8	8	21	0.54	0.37
1/2	6	338	490	16	26	9.5	10	25	1.00	0.73
5/8	6	394	546	18	33	13	13	33	1.59	1.37
3/4	6	432	584	23	38	15.5	16	41	2.36	1.86
7/8	12	625	854	27	44	19	18	48	3.27	3.71