


# 6x36 FC Galv. Steel Wire Rope

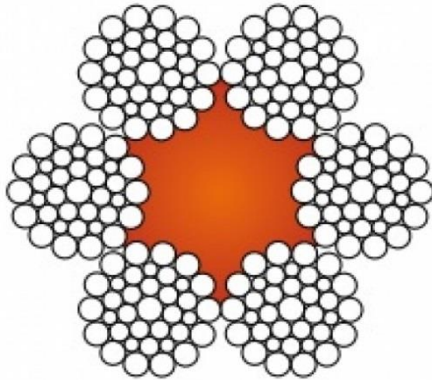

- \* **Number of Stands:** 6 + 1FC
- \* **Number of Wires per strand:** 36
- \* **Tensile Strength of Wire:** 1960 N/mm<sup>2</sup>
- \* **Finish:** Galvanised
- \* **Lay:** R.H.R.L
- \* **Certificates:** Supplied with relevant certificates

		1960 N/mm <sup>2</sup>	
Diameter (mm)	Kg/100M	kN*	Kg*
13.0	62.02	109.30	11143
14.0	71.93	126.80	12923
16.0	93.95	165.60	16879
19.0	132.49	233.00	23802
22.0	177.63	313.00	31911
26.0	248.09	437.00	44571
28.0	287.73	507.00	51691
32.0	375.81	662.00	67515

\*Values refer to Minimum Breaking Loads (M.B.L)