


# Galvanised Turnbuckle Eye/Eye



- \* **Material:** Drop Forged High Tensile Steel SAE 1035 or 1045
- \* **Safety Factor:** MBL equals 5 x SWL capacity
- \* **Standard:** Generally to ASTM F1145-92 Formerly U.S. Fed. Spec FF-T-791b
- \* **Finish:** Hot Dipped Galvanised
- \* **Certificate:** Supplied with relevant Certificates

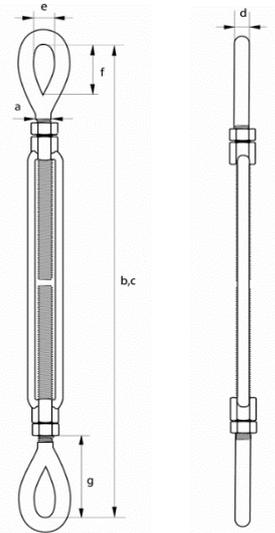

Diameter Thread	Take Up	Length Closed Position	Length Open Position	DIA Eye	Width Inside Eye	Length Inside Eye	Length Closed Position	WLL	Weight Each
A Inches	Inches	B mm	C mm	D mm	E mm	F mm	G mm	Tonnes	KG
3/8	6	302	454	9	13	28	65	0.54	0.32
1/2	6	338	490	12	18	36	80	1.00	0.66
5/8	6	394	546	14	21	43	98	1.59	1.07
3/4	6	432	584	17	25	53	113	2.36	1.65
7/8	12	625	854	20	31	59	118	3.27	3.33